



### **RIGID OR FLEXIBLE PAVEMENT**

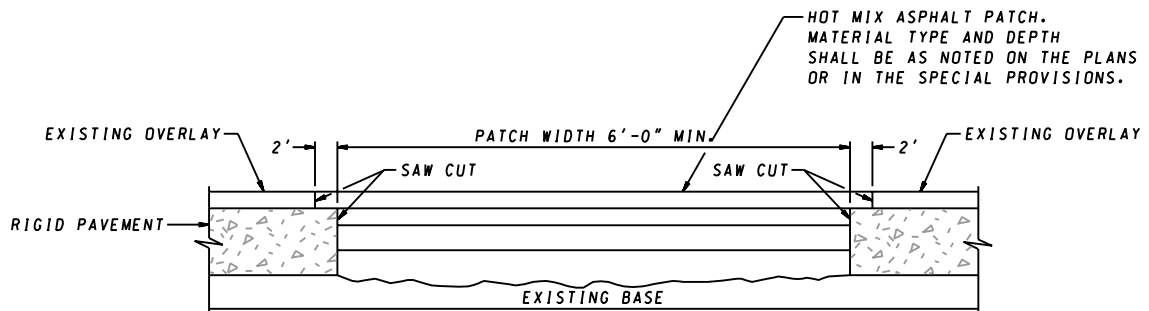

### **RIGID PAVEMENT WITH FLEXIBLE OVERLAY**

#### **NOTES**

1. REFER TO SECTION 505 OF THE SPECIFICATIONS FOR FLEXIBLE PAVEMENT AND TO SECTION 522 OF THE SPECIFICATIONS FOR RIGID PAVEMENT.
2. TACK COAT TO BE APPLIED TO THE PATCH. APPLY EVENLY WITH PRESSURIZED SPRAY WAND.
3. REFER TO APPLICABLE PLAIN AND REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT TYPE 1 AND TYPE 2 REPAIR STANDARDS FOR PERMANENT RIGID REPAIRS.

SPECIFICATION <b>505</b>	CATEGORY CODE ITEMS
APPROVED	<i>Kirk G. McCall</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL <b>3-6-86</b>
	REVISED <b>10-1-01</b>
	REVISED
	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL <b>3-18-86</b>
	REVISED
	REVISED

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES  
**PERMANENT PATCHING FOR RIGID  
 OR FLEXIBLE PAVEMENT USING  
 HOT MIX ASPHALT**

**STANDARD NO. MD 578.03**